



Locking connectors for crimping (contact only)

INTERCOM

FEATURES

Single and double crimp connector.
 Conforms to HE13, HE14, IEC 603-8.
 Double Wipe Removable contact.
 AWG 22 - 24 - 26 - 28.

TECHNICAL DATA

Material: phosphor bronze.

Electrical

Current rating: 3 A maxi.
 Voltage: 500 V eff.
 Insulation resistance: 1×10^5 M Ω mini.
 Contact resistance: 20 m Ω maxi.

Mechanical

Temperature rating: -55°C to +125°C
 Maximum Insulation
 Diameter: \varnothing 1.45 mm

Insertion force:

Tin version: 3 N Maxi per contact
 Gold version: 1.5 N maxi per contact

Withdrawal force:

Tin version: 0.2 N mini per contact
 Gold version: 0.15 N mini per contact

PACKAGING


Recyclable cardboard reels.
 Tooling P/n: Crimping.



Contact

Crimping tool consult us

Contact to be used with housings:
 485 3248 Oxx 740 (single row)
 485 3401 Oxx 740 (double row)

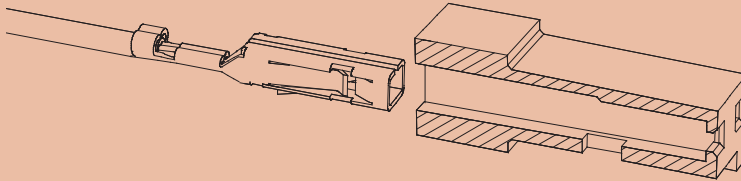

a b c d e

485

3250

000

4x

x

- d** Plating
 2 Tin 4 μ m
 7 Selective gold
 0.2 μ m over 1.27 μ m Ni
- e** Packaging
 1 reel (8000 contacts each)
 2 reel (1000 contacts each)

